

## SHERWIN-WILLIAMS FLAXOAP



This 100% pure linseed oil soap is ideal for all household cleaning purposes. It leaves varnished floors, woodwork and furniture clean and new in appearance. Sherwin-Williams Flaxoap is a splendid cleanser for the finest rugs or carpets.

## SHERWIN-WILLIAMS FLO-WAX

Produces a beautiful waxed finish on varnished or linoleum floors without rubbing or polishing. Sherwin-Williams Flo-Wax represents the latest development in floorwax. Simply spread it with the applicator — it dries in 20 minutes and you use the room without any further work. Sherwin-Williams Flo-Wax lightens housework and makes you proud of your floors.



## SHERWIN-WILLIAMS BRUSHES

The Sherwin-Williams Company recognizes three features in the production of a good paint job. (1) A good painter. (2) Good paint. (3) A good brush.

For best results we recommend the following brushes:

For large jobs—S-W No. 10 or No. 20 Brush  
For small jobs—S-W No. 82 Brush

## THE SHERWIN-WILLIAMS CO.

ADMINISTRATION OFFICES: CLEVELAND, OHIO  
SALES OFFICES, FACTORIES AND WAREHOUSES  
IN PRINCIPAL CITIES




Printed in U. S. A.

CC140 4-36 907

# SHERWIN-WILLIAMS ROOF & BRIDGE PAINT

FOR USE ON ALL KINDS OF  
ROOFS-BRIDGES-BARNs ETC

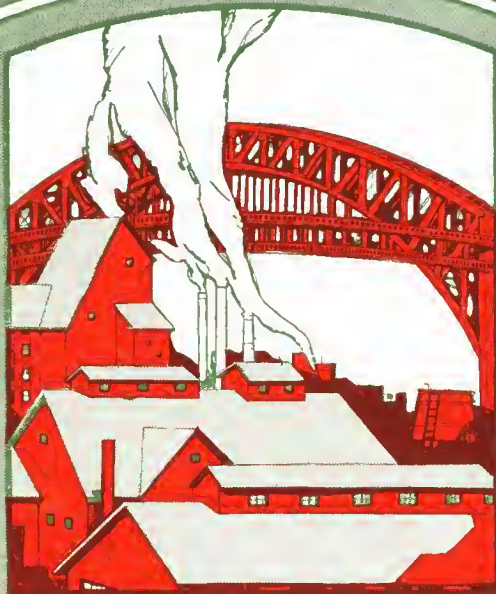

**SOLD BY  
K. A. SPRAGUE  
DEPARTMENT STORE  
ROSCOE, N. Y.**



---

---

# **SHERWIN-WILLIAMS**

## **ROOF AND BRIDGE PAINT**

S-W Roof and Bridge Paint is a utility paint for use on roofs (excepting composition), bridges, barns, manufacturing plants, warehouses, fences and other structures of wood or metal.

In the process of manufacturing paint products on a large scale there is always more or less salvage paint due to overgrinds, damaged containers, etc. This material is used in the manufacture of Roof and Bridge Paint and containing as it does even our highest grade products, the user is assured of greater paint value at economical prices than is possible with other paints.


S-W Roof and Bridge Paint has a covering capacity of approximately 500 square feet, one coat, per gallon. It is put up in quart cans, gallon and five gallon pails and drums and is supplied in the following colors: Red, Gray Slate, Brown, Bronze Green, also Black.

### **DIRECTIONS FOR USE**


Where this paint is used on wooden shingles or on weather-beaten, porous lumber, such as siding, fences, etc., reduce the first coat in the proportion of one-half gallon of raw linseed oil to the gallon of paint.

The addition of one-half gallon of raw linseed oil to the gallon of paint is also recommended for new wood.

For the second or final coat the addition of raw linseed oil will also be beneficial. The quantity of oil to be added will depend upon the covering desired.

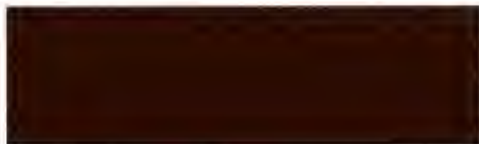

**Red**

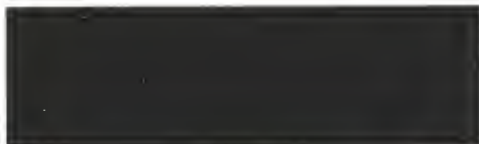

**Gray Slate**



**Brown**



**Bronze Green**



**Black**

---

---

---

---

# **SHERWIN-WILLIAMS**

# **ROOF AND BRIDGE PAINT**

S-W  
paint f  
tion).  
plants  
structu

In t  
produc  
more  
grinds  
mater  
Roof  
as it c  
ucts, t  
value  
sible v

S-W  
ering  
square  
put u  
gallon  
the f  
Brow

Wt  
shing  
lumb  
duce  
one-h  
gallon

Th  
linse  
recon

For  
tion  
ficial  
will c

**Digitized by**



**ASSOCIATION  
FOR  
PRESERVATION  
TECHNOLOGY,  
INTERNATIONAL**

[www.apti.org](http://www.apti.org)

**BUILDING  
TECHNOLOGY  
HERITAGE  
LIBRARY**

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

**Jablonski Building Conservation**  
[www.jbconservation.com](http://www.jbconservation.com)

---

---